


PRODUCT IMAGE / IMAGE DU PRODUIT

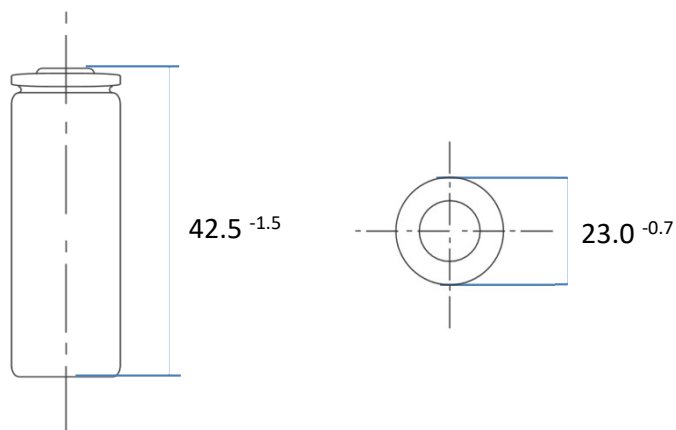


GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Technology / Technologie	Nickel Cadmium
Designation IEC / Désignation IEC	SC
Nominal Capacity / Capacité Nominale	1600 mAh
Nominal voltage / Tension nominale	1.2V
Charging Current / Courant de charge	320-1600mA
Standard Charge / Charge standard	160mA (0.1C) x 16hrs
Average weight / Poids moyen	40g
Dimension	Φ D: 23.0 x H 42.5mm
Internal Impedance / Impédance interne	< 20
Recommended Applications / Applications Recommandées	Electronics /Lighting Electronique / Éclairage


TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE

Operating Temperature / Température d'utilisation	Charge: 0°C to +35°C / Discharge: -20°C to +60°C
Storage temperature range / Température de stockage	-5°C to +35°C
Number of Charging cycles / Nombre de cycles de charge	> 500

Standard Charge Curve (Charge 160mA x 16Hrs,

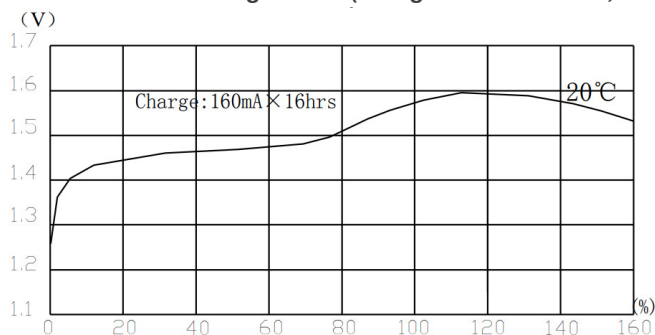

Discharge Curve (Charge 160mA x 16Hrs, 20°C, Discharge 0.2C)

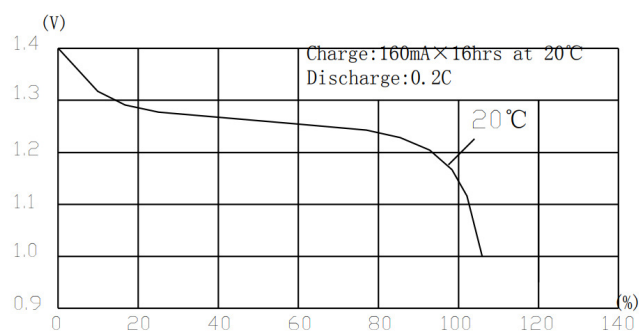

Charge / Discharge Efficiency

